

Neural Network Controller Application on a Visual based Object Tracking and Following Robot

Pola Risma, Tresna Dewi*, Yurni Oktarina, and Yudi Wijanarko

Department of Electrical Engineering, Politeknik Negeri Sriwijaya

**tresna.dewi@polsri.ac.id*

ABSTRACT

Navigation is the main issue for autonomous mobile robot due to its mobility in an unstructured environment. The autonomous object tracking and following robot has been applied in many places such as transport robot in industry and hospital, and as an entertainment robot. This kind of image processing based navigation requires more re-sources for computational time, however microcontroller currently applied to a robot has limited memory. Therefore, effective image processing from a vision sensor and obstacle avoidances from distance sensors need to be processed efficiently. The application of neural network can be an alternative to get a faster trajectory generation. This paper proposes a simple image processing and combines image processing result with distance information to the obstacles from distance sensors. The combination is conducted by the neural network to get the effective control input for robot motion in navigating through its assigned environment. The robot is deployed in three different environmental setting to show the effectiveness of the proposed method. The experimental results show that the robot can navigate itself effectively within reasonable time periods.

Keywords: Image Processing, Neural Network, Object Following Robot, Tracking Robot, Vision-based Control.

1. INTRODUCTION

Navigation is an important issue for mobile robot due to its mobility in an unstructured or unknown environment [1]. One of the navigation methods is by tracking and following an object. The object-tracking-and-following robot is applied in many places, such as a domestic application for games such as soccer robot, and industry, restaurant [2] and hospital for transport robot [3][4], where a robot is only required to detect and follow a human or another robot without physical attachment [5]-[8].

The navigation task occurs in an object-tracking-and-following robot had been an issue in finding the most effective ways to get the robot smoothly move from starting point to the final one. Vision-based navigation relies on image processing process that requires more memory resources. Therefore it is quite challenging to get an effective trajectory concerning the source needed by the computing time to get the precise detection with image processing. The microcontroller commonly installed on the robot has a limited memory that has to be divided between image processing for object detection and controlling motor to get the right direction and

velocity. This division needs to be done due to the limited source. Therefore, the effective and efficient method in image processing is required.


Several control methods had been presented to get an effective and efficient trajectory for the robot including the classic control theorem, PID controller. In many cases, the PID controller only is not enough, however, to get a more effective re-sult, researchers combined it with an advanced controller such as adaptive control and artificial intelligence (AI). The most commonly apply controller is the fuzzy logic controller [9]-[11]. Another type of AI is the neural network, which imitates how the human brain works [12]-[18].

Image processing [19] should be kept simple and efficient to avoid unnecessary memory usage. The image processing method can be combined with the neural network to obtain an effective trajectory tracking. Trajectory generation as part of mobile robot navigation system can be online or off-line or predefined. The process of trajec-tory generation includes obstacle avoidance and target reaching [20]-[22]. Therefore the combination with AI will enhance the efficiency in target tracking due to robot ability in deciding the best path to get the destination faster due to the installed brain.

This paper proposes the combination of neural network and image processing for object tracking and following robot. The effectiveness of the proposed method is shown by setting the robot is to track and follow a red ball as the target in several environment settings. Image processing method is applied to detect the target, and the processing is kept simple to reduce memory usage. The robot is also equipped with proximity sensors to ensure the smooth trajectory tracking. The inputs from a vision sensor and proximity sensors become the inputs to the neural network, and the output will be utilized by the microcontroller to control robot motion.

2. MOBILE ROBOT DESIGN

The mobile robot considered in this paper is the differential driven mobile robot shown in 1. This type of robot is commonly applied in many applications. The position and orientation is given by $q_r = [x_r, y_r, \phi_r]^T$, where x_r and y_r is the X and Y axis, and ϕ_r is the orientation respect to Z axis.

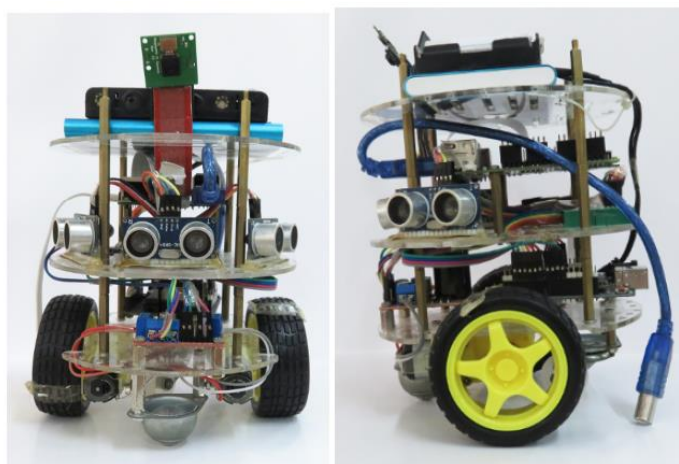

(a) Right side of robot

(b) Left side of robot

FIGURE 1. The designed mobile robot

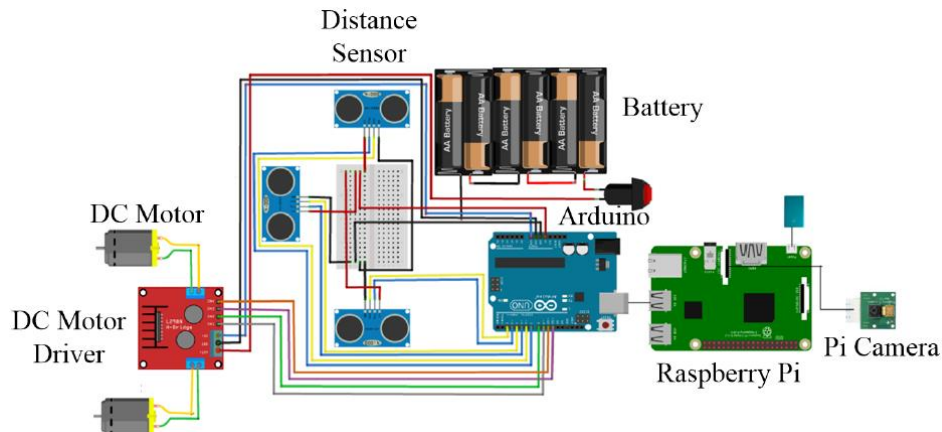


FIGURE 2. Schematic Diagram

The translational velocities derived from the orientation are:

$$v = [v_{m1}, v_{m2}]^T \quad (1)$$

and the angular velocity is given by:

$$\omega = \frac{R}{2L} (\dot{\theta}_r - \dot{\theta}_l) \quad (2)$$

where v_{m1} and v_{m2} are the left and right motor velocities, $\dot{\theta}_r$ and $\dot{\theta}_l$ are the left and right wheels angular velocities respectively.

The control input applied to the robot is:

$$u = \frac{R}{2} (\dot{\theta}_r + \dot{\theta}_l) \quad (3)$$

where θ_r and θ_l are the left and right wheels orientation

The robot applied in this research is equipped with three distance sensors ($DS1-DS3$), and a vision sensor (VS). The vision sensor installed to the robot is a Pi camera, and image processing for object detection is conducted in the Raspberry Pi. The complete components installed to this robot is shown in Figure 2. The robot in this paper is considered moving only forward without slipping and skidding.

3. IMAGE PROCESSING

Trajectory generation based on object detection relies heavily on image processing. In this paper, image processing is made to be simple and yet effective in detecting the target. The target considered is a red ball. The raw image captured by

Pola Risma, Tresna Dewi, Yurni Oktarina, and Yudi Wijanarko
Neural Network Controller Application on a Visual based
Object Tracking and Following Robot

Pi Camera is processed by Raspberry Pi and becomes the input to the neural network controller.

Figure 3b shows the result of HSV process. HSV (hue, saturation, value) is converted from RGB image (original image in fig. 3a). Hue is a measure of the wavelength and saturation is the amount of white light inside hue. HSV separates the image intensity from color information, in this method the ball shape and red image color component can be separated from the background colors.

The conversion of RGB to HSV can be represented by

$$R_n = \frac{R}{2^b}, \quad G_n = \frac{G}{2^b}, \quad B_n = \frac{B}{2^b} \quad (4)$$

where R_n , G_n , and B_n are the normalized of RGB component and b is the bit length of each color component.

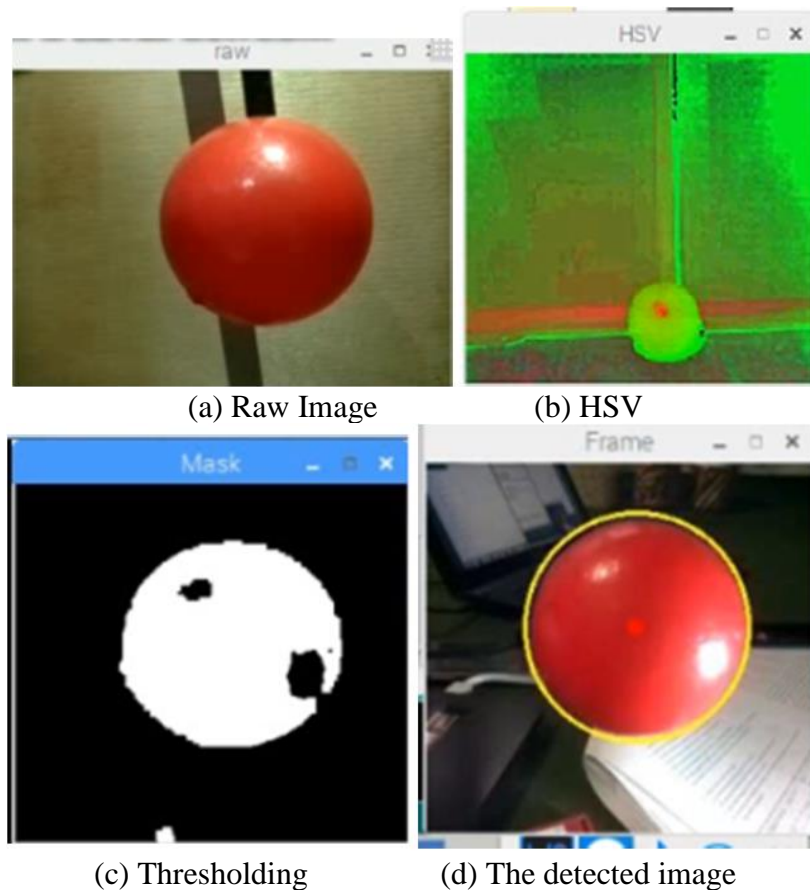


FIGURE 3. The designed mobile robot

The process is continued to Figure 3c by partitioning the raw image into the foreground and background. Thresholding isolates the red ball by converting the grayscale images into a binary image, and therefore by analyzing the level of contrast, the red ball is detected as shown in Figure 3d. The yellow box shown in Figure 3d is only for the viewer, to indicate that the target is detected.

The result of image processing is the coordinate position of the target in x and y –axis. Based on this detected coordinates, the robot can follow the target effectively.

4. NEURAL NETWORK CONTROLLER

The neural network controller is the part of artificial intelligence that mimics the human brain to decide the outputs. In this study, the back-propagation is applied to determine robot motion based on the inputs from a vision sensor and distance sensors attach to the robot. Figure 4 shows the application of a neural network in this study.

The neural network design is including four input layers, three from distance sensors and one from a vision sensor. Five hidden layers are chosen as the most effective ones after trial and error, and the output is control input to the main controller. The control input in this study is the translational and angular velocities.

Distance sensors give the distance information between the robot and the obstacles and the red ball as the target. The left and right distance sensors are utilized mainly for obstacle avoidance, and the front distance sensor is for keeping the safe distance with the target. As the vision sensor detects the target, the robot will move to follow it at a certain distance, and this condition is updated online provided by the neural network controller. The obstacles detection also affect the robot velocity and orientation, when the robot is approaching the target or obstacles, the controller will reduce the PWM signal to DC motor driver to slow down the robot, and if the detection by one of the distance sensors, the robot might turn left or right depend on the situation.

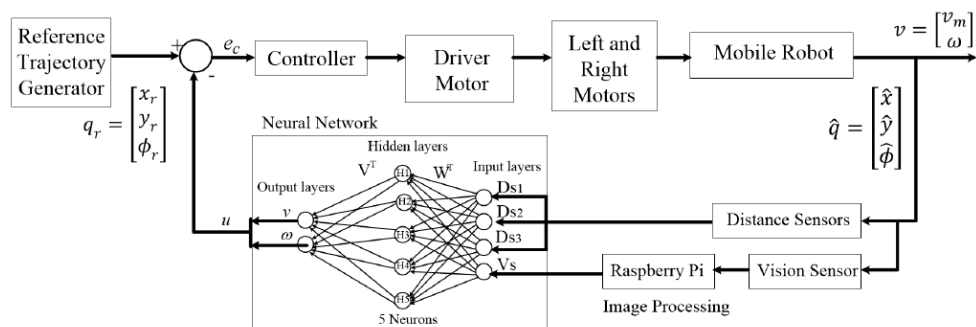


FIGURE 4. Neural network application in this study

5. RESULT AND DISCUSSION

The effectiveness of the proposed method for object detection and tracking robot is proven by deploying the robot in several environments setting. The robot is set to follow the target (red ball) from initial position to final position and avoiding obstacles without losing the sight of the target.

Pola Risma, Tresna Dewi, Yurni Oktarina, and Yudi Wijanarko
Neural Network Controller Application on a Visual based
Object Tracking and Following Robot

The robot is controlled by Arduino Uno which includes ATmega micro-controller connected to 2 DC motor driver L298N for 2 DC motors. The power supply is provided by 1900 mAH battery to power DC motor driver, DC motor, distance sensors, and Arduino UNO. A powerbank is also included to power Raspberry Pi responsible for image processing. The robot weight is 0.5 kg, height 20cm, and diameter 14.5 cm.

The detected image in the image plane gives the x and y coordinates. The image plane is set to be in 256 240 pixel and based on that pixel setting. The x coordinate range is 0 - 256, and the y coordinate range is 0 - 240. The pixel setting is based on trial and error, the higher the resolution, the more memory resource needed, and the slower the process is. The robot moves based on the target and obstacle detection. The x and y coordinate position of the target is the input for robot direction and orientation, as shown in Table 1.

Figure 5 shows robot motion in the environment setting 1. This setting does not include many obstacle avoidances only at the beginning and when the robot reaches the final position. Figure 6 is similar with figure 5, the difference is on the obstacle avoidance in Figure 6b and 6e. Figure 7 shows robot motion in environmental setting 3, in this setting, the robot is deliberately set to encounter obstacles, and the robot successfully follows the target and reach final position without crushing to any obstacles. Table 2 shows the times require for the robot to finish its task in 3 environmental settings.

TABLE 1.

Target position in image plane and robot motion relationship

Target x-axis Coordinate	Right motor	Left motor	Robot Motion
0 - 90	1 (High)	0 (Low)	Turn left
100 - 170	1	1	Forward
175 - 257	0	1	Turn right

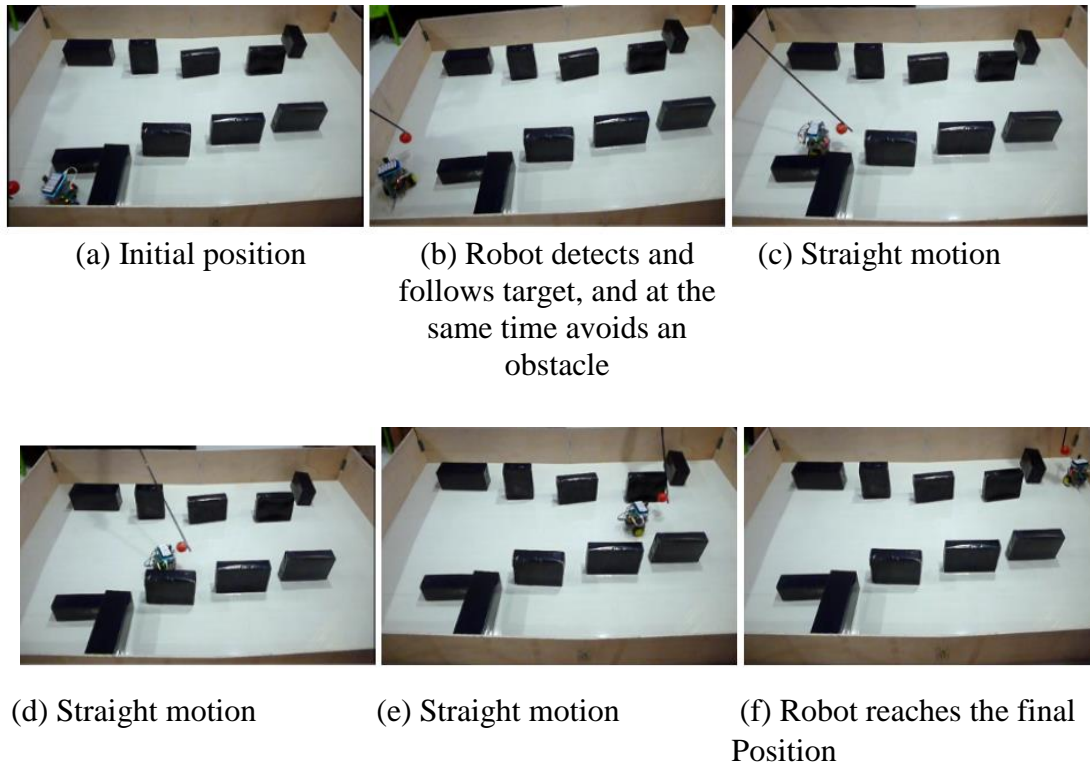


FIGURE 5. Robot motion in environment setting 1

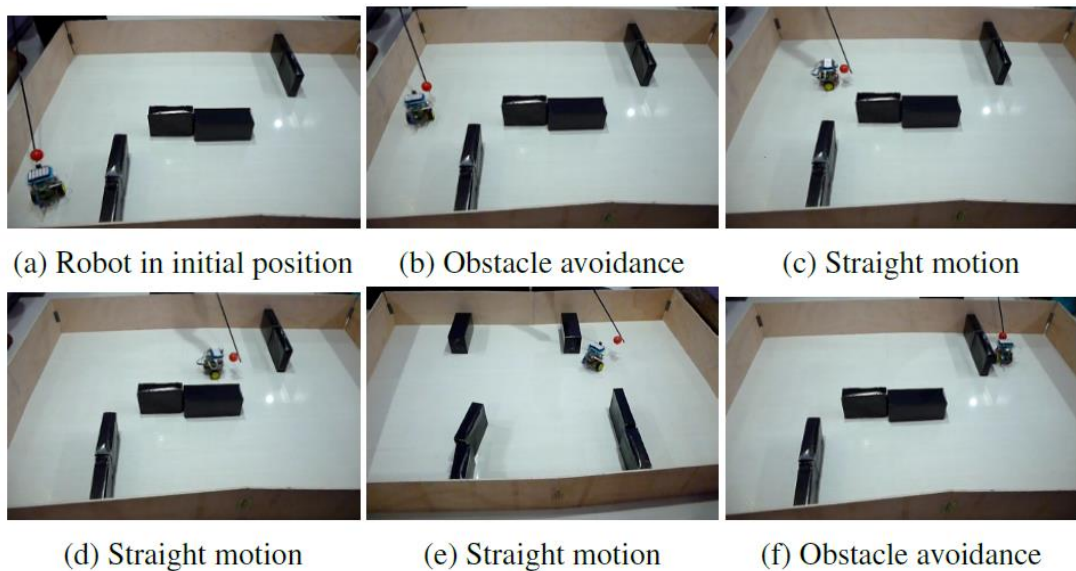


FIGURE 6. Robot in environment setting 2

TABLE 2.

Time requires to reach final position in 3 environments setting

Environment Setting No.	Number of Trial (in second)				
	1	2	3	4	5
1	38.81	36.06	30.48	30.94	29.23
2	34.90	52.96	43.28	37.27	53.38
3	44.35	59.11	45.09	60.01	49.05

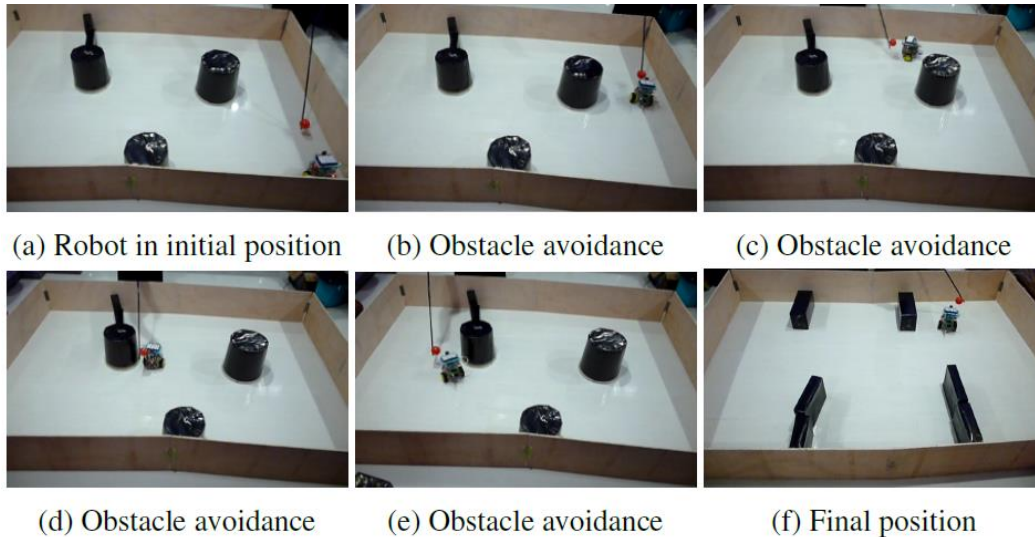


FIGURE 7. Robot motion in environment 3

6. CONCLUSION

This paper presents the application of a neural network controller for a vision based object tracking and following robot. There are two types of sensors installed in this robot, distance sensors, and a vision sensor. Sensors output becomes the input for the neural network, and its output is the input to the main controller to control robot motion. The robot is applied in three environmental settings to show the effectiveness of the proposed method, and the robot can finish all the assigned tasks in reasonable time periods.

REFERENCES

- [1] A. J. Soroka, R. Qiu, A. Noyvirt and Z. Ji, "Challenges for service robots operating in non-industrial environments," IEEE 10th International Conference on Industrial Informatics, Beijing, 2012, pp. 1152-1157. doi: 10.1109/IN-DIN.2012.6301139
- [2] Y. X. Shi, "Software Design of Restaurant Service Mobile Robots Control System," Advanced Materials Research, Vol. 462, pp. 743-747, 2012.
- [3] S. Jeon and J. Lee, "Performance analysis of scheduling multiple robots for hospital logistics," 2017 14th International Conference on Ubiquitous Robots

- and Ambient Intelligence (URAI), Jeju, 2017, pp. 937-940. doi: 10.1109/URAI.2017.7992870.
- [4] M. Takahashi, T. Suzuki, F. Cinquwgrani, and R. Sorbello, "A Mobile Robot for Transport Applications in Hospital Domain with Safe Human Detection Algo-rithm," IEEE Int. Conf. Robot. Biomimetics, vol. 3, pp. 15431548, 2009.
- [5] A. Ahmad, "Mengenal Artificial Intelligence, Machine Learning, Neural Network, dan Deep Learning," no. October, 2017.
- [6] C. Astua, R. Barber, J. Crespo, and A. Jardon, "Object Detection Techniques Applied on Mobile Robot Semantic Navigation," Sensors, vol. 14, no. 12, pp. 67346757, 2014.
- [7] P. Benavidez and M. Jamshidi, "Mobile Robot Navigation and Target Tracking System," 6th Int. Conf. Syst. Syst. Eng. Albuquerque, New Mex. USA, pp. 299304, 2011.
- [8] J. Kim and Y. Do, "Moving obstacle avoidance of a mobile robot using a single camera," Procedia Eng., vol. 41, no. Iris, pp. 911916, 2012.
- [9] M. Faisal, R. Hedjar, M. Al Sulaiman, and K. Al-Mutib, "Fuzzy logic navigation and obstacle avoidance by a mobile robot in an unknown dynamic environment," Int. J. Adv. Robot. Syst., vol. 10, 2013.
- [10] K. B. Hong Sai Tang, Nakhaeia Danial, "Application of Fuzzy Logic in Mobile Robot Navigation," Intech, p. 428, 2012.
- [11] F. A. M. Al Yahmedi and S Amur, "Fuzzy Logic Based Navigation of Mobile Robots," Intech, p. 452, 2011.
- [12] T. Dewi, P. Risma, Y. Oktarina and M. T. Roseno, "Neural network controller design for a mobile robot navigation; A case study," 2017 4th International Con-ference on Electrical Engineering, Computer Science and Informatics (EECSI), Yogyakarta, 2017, pp. 1-5. doi: 10.1109/EECSI.2017.8239168.
- [13] T. Dewi, N. Uchiyama, S. Sano, and H. Takahashi, "Swarm Robot Con-trol for Human Services and Moving Rehabilitation by Sensor Fusion," Journal of Robotics, vol. 2014, Article ID 278659, 11 pages, 2014. <https://doi.org/10.1155/2014/278659>.
- [14] I. Engedy and G. Horvath, "Artificial neural network based mobile robot naviga-tion," 2009 IEEE Int. Symp. Intell. Signal Process., no. May 2014, pp. 241246, 2009.
- [15] N. Larasati, T. Dewi, and Y. Oktarina, "Object Following Design for a Mobile Robot using Neural Network," vol. 6, no. 1, pp. 514, 2017.
- [16] J. Savage, S. Munoz,~ M. Matamoros, and R. Osorio, "Obstacle Avoidance Be-haviors for Mobile Robots Using Genetic Algorithms and Recurrent Neural Net-works,"IFAC Proc. Vol., vol. 46, no. 24, pp. 141146, 2013.
- [17] Dezfoulan and S. Hamid, "A Generalized Neural Network Approach to Mobile Robot Navigation and Obstacle Avoidance," Intell. Auton. Syst. 12, vol. 193, pp. 2542, 2012.

Pola Risma, Tresna Dewi, Yurni Oktarina, and Yudi Wijanarko
Neural Network Controller Application on a Visual based
Object Tracking and Following Robot

- [18] P. K. Mohanty and D. R. Parhi, "A New Intelligent Motion Planning for Mobile Robot Navigation using Multiple Adaptive Neuro-Fuzzy Inference System," *Appl. Math. Inf. Sci.*, vol. 8, no. 5, pp. 25272535, 2014.
- [19] L. Beran, P. Chmellar, and L. Rejtek, "Image Processing Methods Usable for Object Detection on the Chessboard," *MATEC Web of Conferences*, vol 75, 03004, 2016. DOI: 10.1051/mateconf/20167503004.
- [20] T. Dewi, P. Risma, Y. Oktarina, and M. Nawawi, "Neural Network Simulation for Obstacle Avoidance and Wall Follower Robot as a Helping Tool for Teaching-Learning Process in Classroom," *IOP Conference Series: Materials Science and Engineering*, vol 403, no. 1, 2017 1st Int. Conf. Eng. Appl. Technol., pp. 705717, 2017.
- [21] I. Susnea, V. Minzu, and G. Vasiliu, "Simple, real-time obstacle avoidance algorithm for mobile robots," *Recent Adv. Comput. Intell. Man-Machine Syst. Cybern.*, no. figure 2, pp. 2429, 2009.
- [22] A. Cherubini et al., "A Redundancy-Based Approach to Obstacle Avoidance Applied to Mobile Robot Navigation," *Int. Conf. Intell. Robot. Syst.*, 2010.